




ACTAtek™ – UNINTERRUPTIBLE POWER SUPPLIES (UPS)

info@actatek.com

UPS for ACTAtek™ / Secure External Relay / Electric Door Lock

Highly reliable Uninterruptible Power Supplies (UPS) power supplies for ACTAtek™, secure external relay and electric door lock. This is designed to protect sensitive equipment used in harsh power environments.

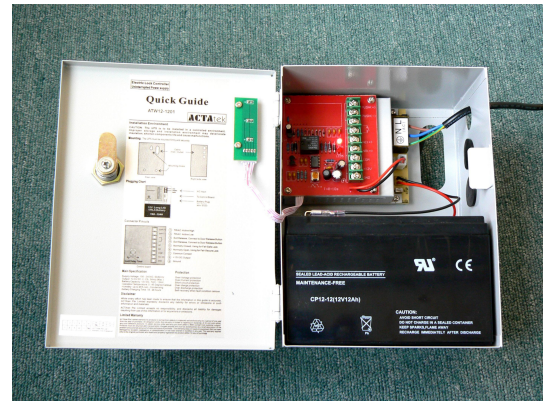

FEATURES & BENEFITS

- AGM technology, no excess fluid electrolyte, can work in any position
- No corrosive gas will be generated in application
- Low self discharge rate, close coherence of voltage and capacity by strict producing control
- Available with anti-flame ABS plastic container reaching UL94V-O standard

PROTECTION

- Over-Voltage protection
- Over-Current protection
- Short circuit protection
- Over charge protection
- Over discharge protection
- Self-recovery when fault condition remove

UPS Technical Specifications

Features	Technical Specifications
Battery Type	VRLA
Supply Voltage	100-240 AC 50/60Hz
Output	13.5V DC +/-2%, 3Amp (Max.)
Battery Capacity	12V DC, 7Ah / 12Ah
Operating Temperature	0 to 45 Degrees Celsius
Humidity	Up to 95% non - Condensing
Battery Charging Time	18 – 36 Hours
Average Continuous Operation with ACTAtek™ Connected	12Ah: 10-16 hours
Average Continuous Operation with ACTAtek™ , External Secure Relay and electric lock (500mA lock) Connected	12Ah: 8-10 hours
Relock Delay time	0-15 seconds
Weight	5kg
Dimension	16.5cm x 21.5cm x 11.5cm
Warranty	1 Year



